

Der Partner in
Ihrer Nähe



HEDEMANN
Gabelstapler



Electric Light Forklift

ECG50-90
Lithium-ion or
Lead Acid



Hedemann GmbH
Oldenburger Straße 28
D-26639 Wiesmoor

Tel.: +49 (0) 49 44 / 14 50
Mail: kontakt@hedemann-stapler.de
Web: www.hedemann-stapler.de

The time is now to go electric

Kalmar's electrically powered 5 - 9 tonne forklift trucks will help improve the eco-efficiency of your operations while maintaining the highest levels of productivity and safety. With a choice of either Lead Acid or Lithium-ion batteries and different charging solutions, we can work with you to design a solution that will deliver for your business.

Eco-efficiency built in

Being electrically powered, your forklift truck will produce zero carbon emission at source, making them cleaner and safer to operate. You can cut your carbon emissions even further by using green energy sources where available or start to generate and use your own power. Getting an electrically powered forklift is only the start of our eco-efficient journey. One that we will be with you every step of the way.

Productive by nature

With an electric powered driveline your drivers will notice a big difference with faster and smoother acceleration and more responsive handling while being able to lift up to 9 tonnes efficiently and safely. Less time will be spent servicing and maintaining the electric powertrain since it has less moving and mechanical parts, plus you will be able to keep it running optimally within a broad range of temperatures.

Safety in focus

Kalmar's range of electrically powered 5-9 tonnes forklift trucks offer highly responsive handling and superior visibility from the cabin, helping to keep your driver safe and in control at all times. Your drivers and co-workers will also benefit from the reduced noise and vibrations with a smooth and quiet electric powertrain. There are also a large range of safety options available that can further enhance the safety of your equipment and the drivers operating them.

A full range

Kalmar has offered an extensive range of electrically powered forklift trucks since 1980 with over 6000 machines sold and now come with a choice between Lead Acid and Lithium-ion battery technology, lifting capacities up to 33 tonnes, different masts and numerous attachments. We can work with you to design a solution that delivers against your exact requirements.



Improve the eco-efficiency of your operations while maintaining the highest levels of productivity and safety.

Our electric portfolio

Kalmar offers an extensive range of electrically powered forklift trucks with lifting capacities from 5-33 tonnes, three different lifting masts and a wide range of specialist attachments: making our electrically powered forklift trucks suitable for a wide variety of material handling tasks.

Battery and Charging Monitoring

Real-time status on battery capacity and health along with charging usage and timing allows for optimised operational planning and usage.

Kalmar Insight®

MyKalmar INSIGHT gives you the ability to monitor your fleet's operational status in real time no matter what type of your equipment you operate.

Additional Energy Storage

You can use additional energy storage units to capture excess power that you may have produced to use at a later time when required instead of buying from the grid.

Charging Post for Li-ion Equipment



Chargers with REMA connectors for 80V resp. 120V charging of ECG50-90 and ECG90-180 ranges, or charging post with high voltage CCS2/CCS1 connector for ECG180-330 range, reachstackers and empty container handlers.

Reachstackers

Kalmar offers a choice of electrically powered reachstackers with a wide range of lifting applications, battery solutions and can handle loads up to 45 tonnes.

Empty Container Handler

Kalmar's range of electrically powered empty container handlers can operate for up to a full shift on a single charge, lifting loads up to 11 tonnes and placing them up to 8+1 high with our double stacker.

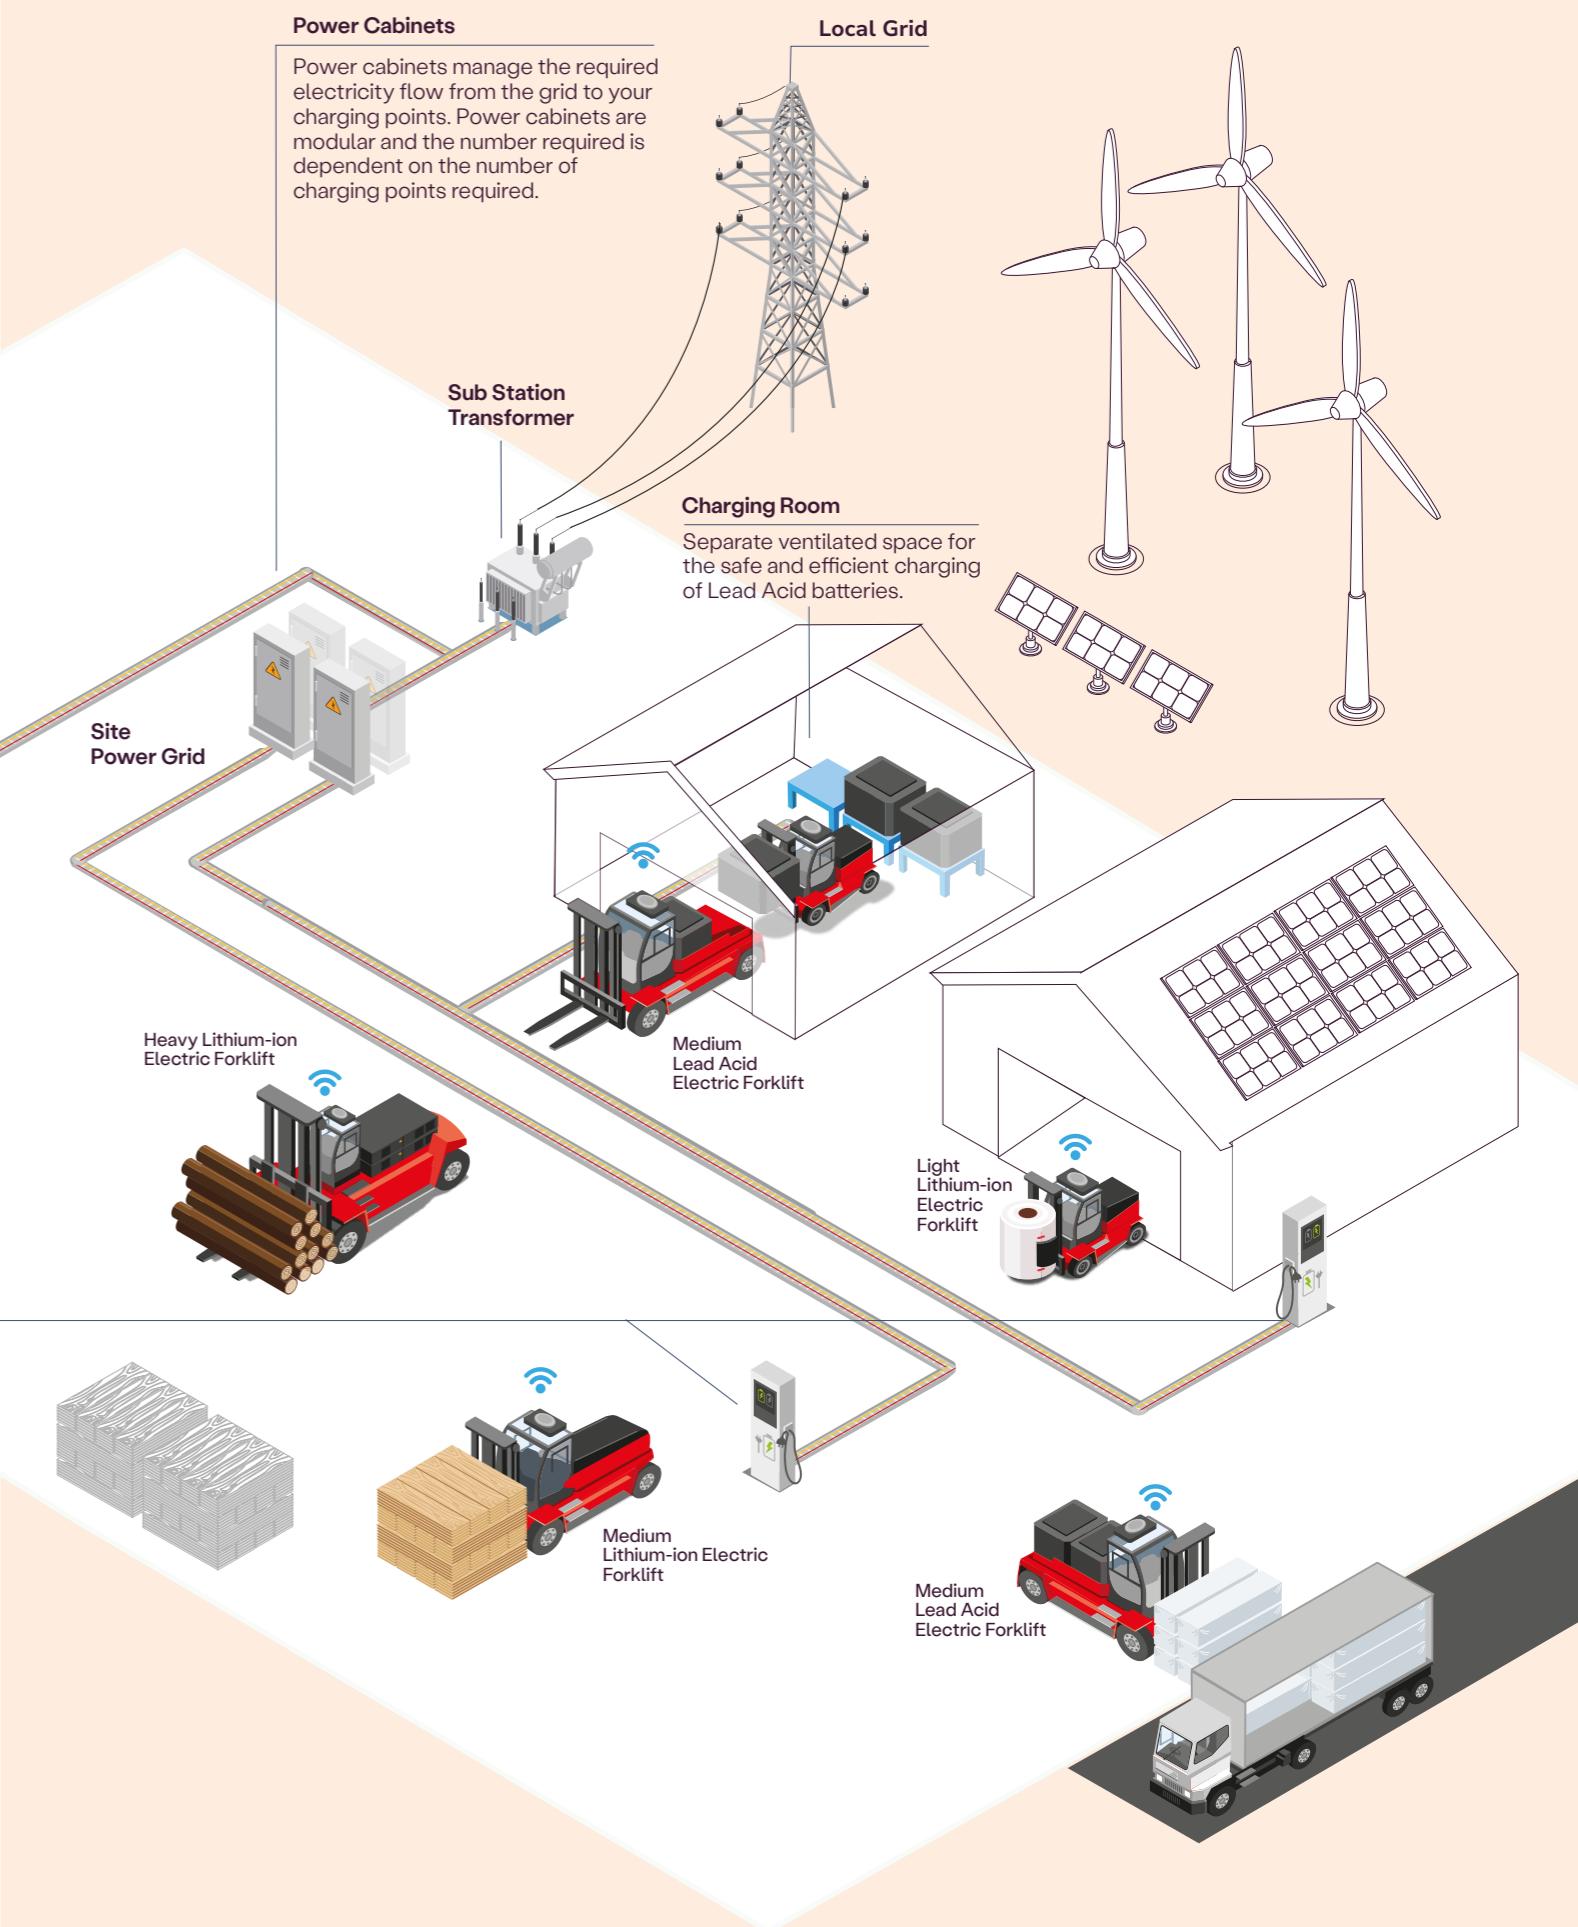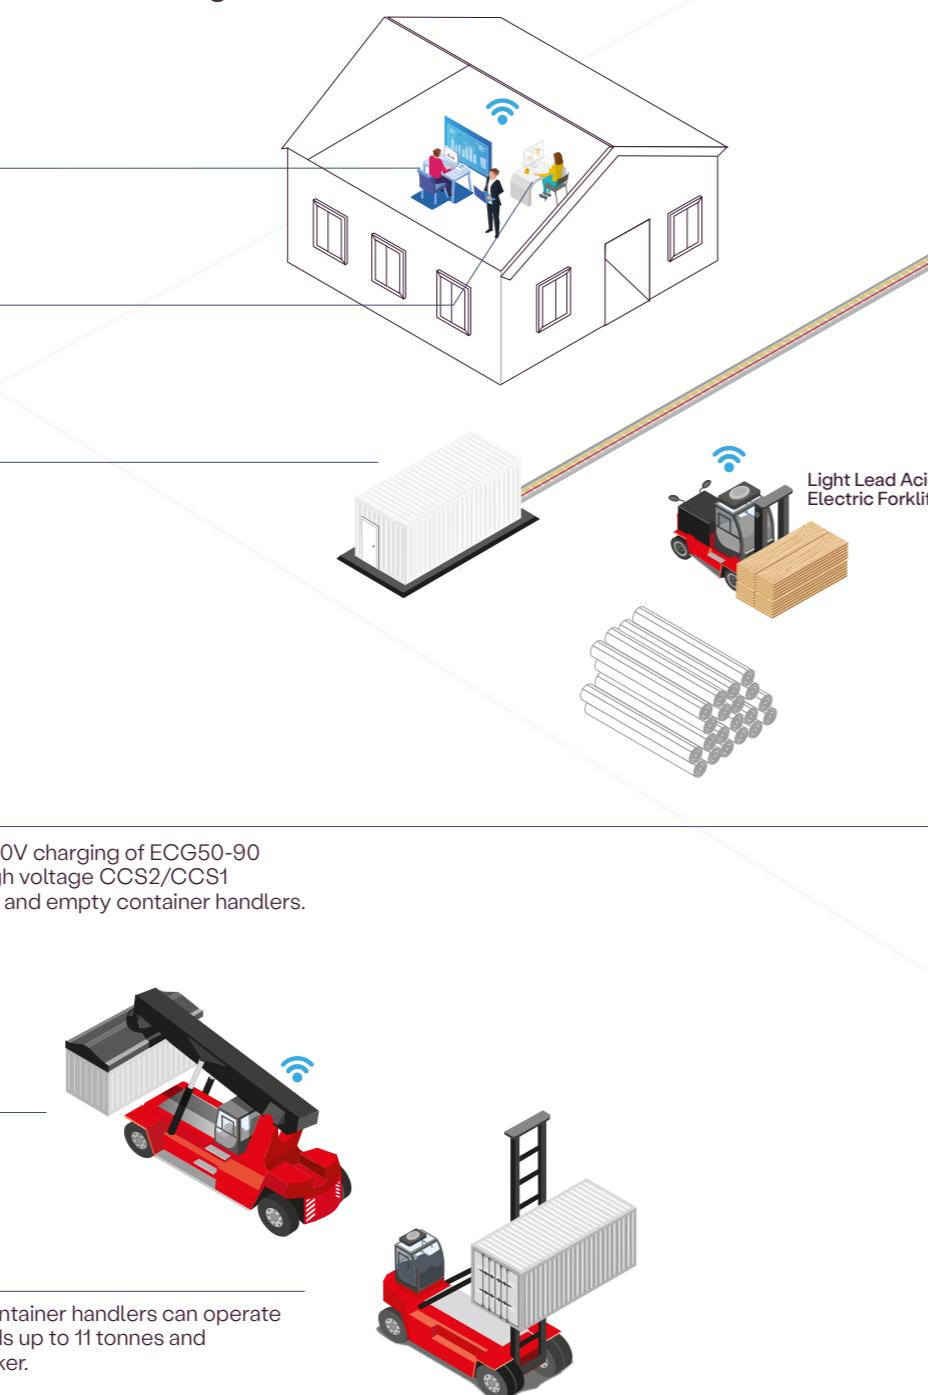


Great for the environment

What type of battery solution is right for you?

Kalmar offers two types of battery technology to power its forklifts, Lead Acid and Lithium-ion. Here is a chart that demonstrates the difference between the two battery types so you can decide which is the right solution for your operations.

The Lead Acid battery can be charged directly in a safe location without removal, or it may be removed after a shift and fully charged before being refitted onto the forklift. The Lithium-ion battery can be continuously recharged during operational downtime or statutory break.

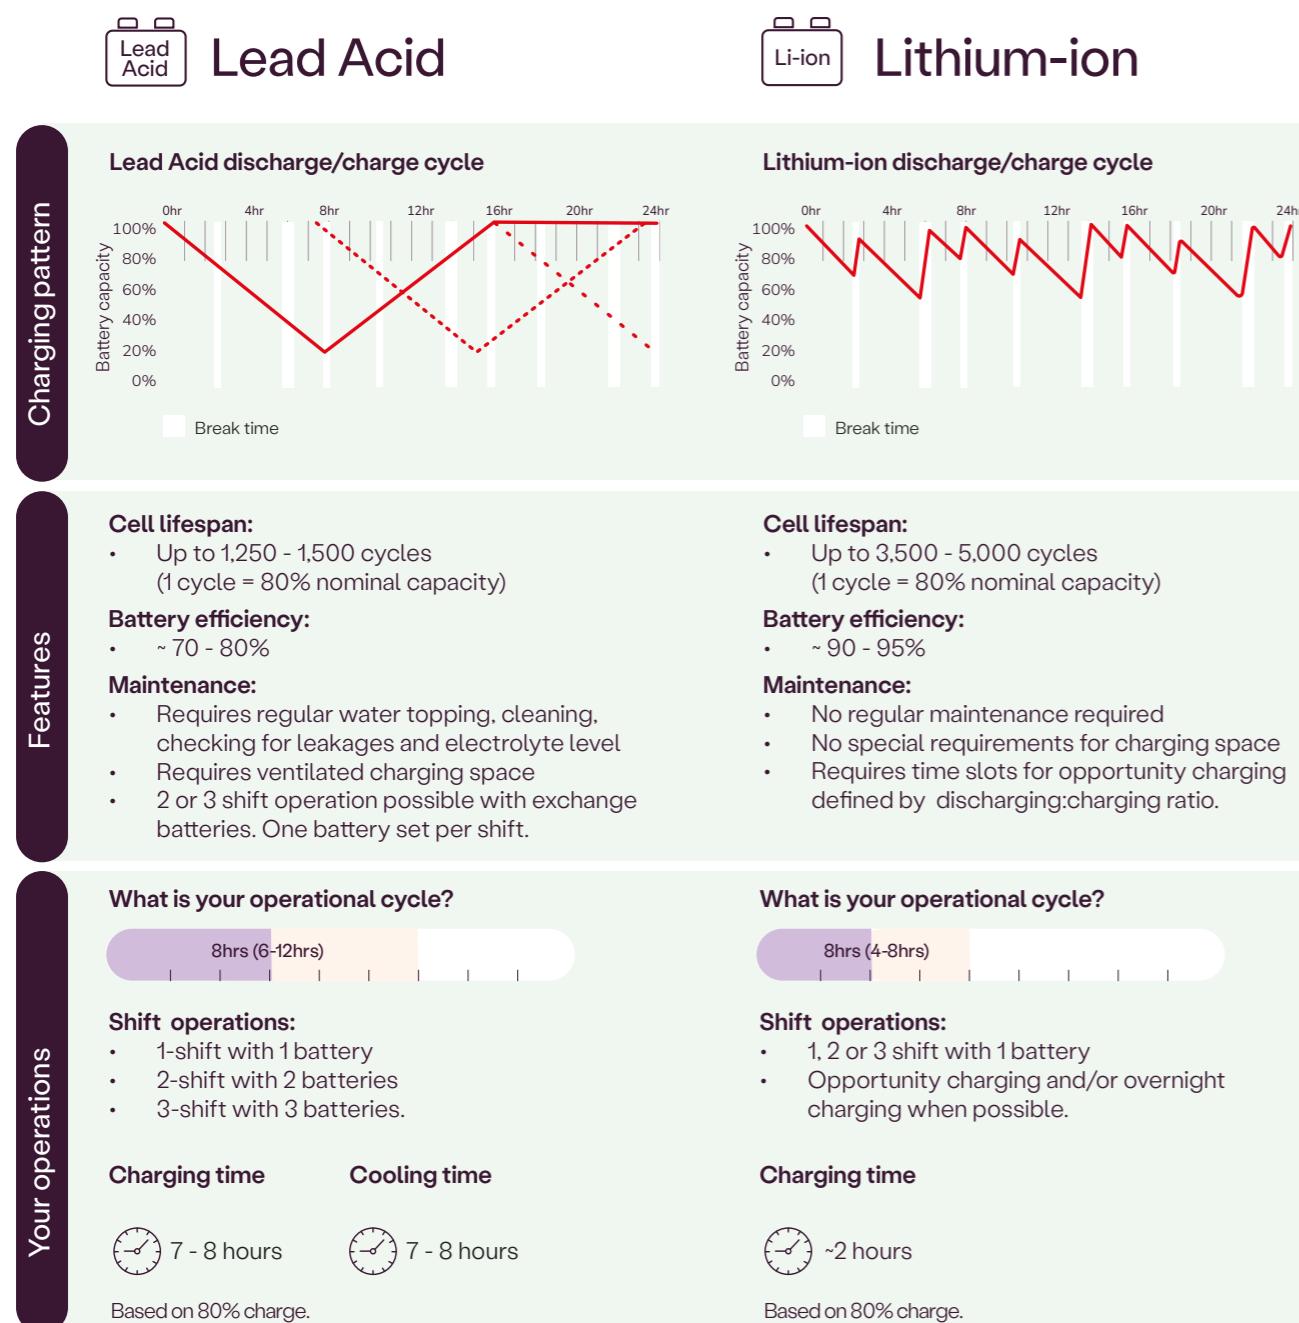


Good for business

Reducing your emission shouldn't come at a cost, it should be beneficial to both the environment and your bottom line.

Kalmar's electric forklift trucks deliver on both accounts. They are just as powerful and efficient as diesel models without producing any harmful carbon emissions. In fact, they produce zero emissions at source, which will help you substantially cut your fuel bills, while improving your environment credentials.



It pays to go electric

With our electrically powered forklift trucks, you will benefit from reduced fuel costs, spend up to 50% less on servicing - as electric machines have less moving parts, require no oil or filter changes and have longer service intervals, both helping to maximise machine availability. Even though electric forklift trucks cost a little more than diesel models, the payback period can be as little as two years. After this time, the savings really start to add up.



Eco-efficiency at work

Reducing the fuel consumption of your equipment also reduces your emissions, which will enhance your environmental reputation and help you meet current and future emissions standards. Together we can shape the future of cargo handling, with safe and eco-efficient solutions that improve your every move.

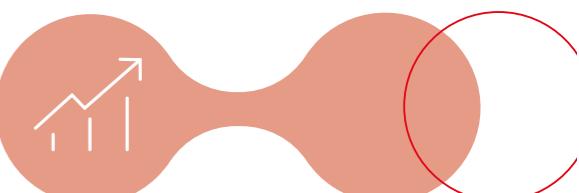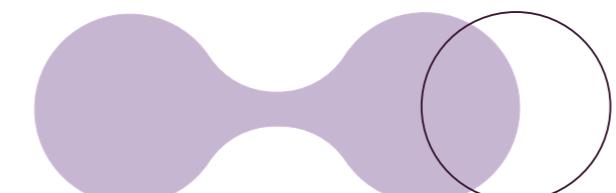

The power is in your hands

By combining three highly efficient AC-motors [two for the traction drive, each individually connected to the left and right wheel gears, and one for the hydraulic pump] all with direct drive, and no transmission you get a powertrain combination that will deliver on power and productivity while producing zero carbon emissions at source.

This electrically powered solution has been designed to offer a sustainable and highly efficient forklift range, with great performance, high productivity and is safe and smooth to operate with minimised energy losses - giving you more running hours on each charge. Regenerative power from the braking system returns power to the batteries, further enhancing the overall efficiency of the system. You just need to choose the optimal battery solution for your operation; Lead Acid or Lithium-ion.


Lithium-ion

There are two different Lithium-ion batteries available, on the truck wheel base, which can be quickly opportunity charged during operational hours or fully charged overnight.


Battery sizes



Battery sizes

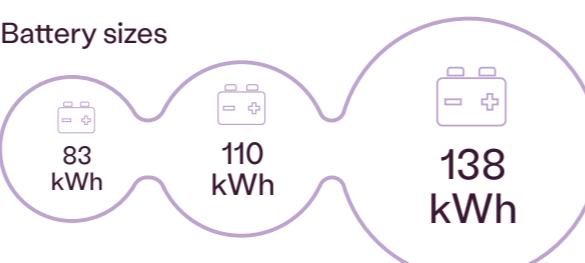

Operational hours per drive cycle

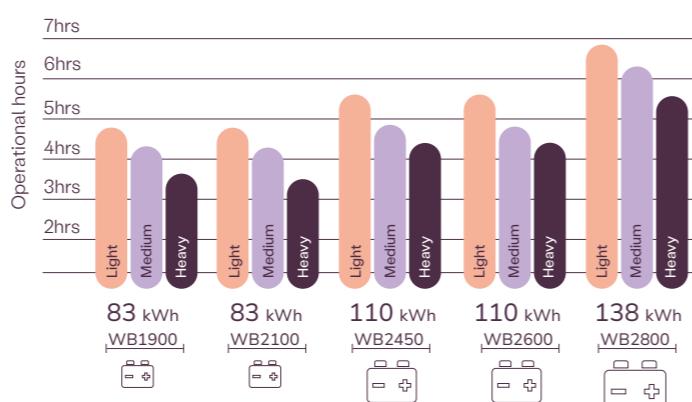


Modular by design


Batteries and chargers are a big part of your overall investment making it critical that you get a solution that is matched to your operational requirements, which is why Kalmar has taken a modular approach to our Lead Acid and Lithium-ion battery and charging solutions.

There are a number of different charging options available for you to choose from.

Lead Acid solution:

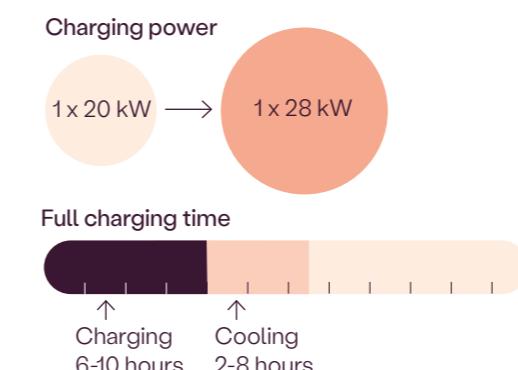

Lithium-ion solution:

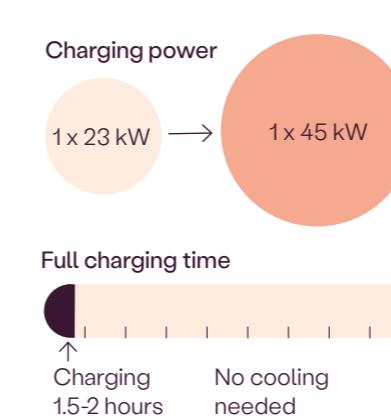

Kalmar can help you work out which battery option and charging solution is right for your business based on your current work cycles.

Managing your power

With our Lead Acid solution, the Battery Monitoring Unit [BMU] is mounted to the battery and connected to the battery, charger and cloud. This enables the BMU to monitor the current, voltage, water level, temperature and balance between cells.

For the Lithium-ion solution, the Battery Management System [BMS] is mounted within each battery cell, connecting the battery, charger and cloud. This enables the BMS to manage battery charging and all other important parameters.

While the forklift controller redirects regenerative braking energy back into the battery packs.

Data from the BMU / BMS is displayed in Kalmar Insight* allowing you to secure optimal battery use to ensure warranty conditions are met and the longest possible lifetime of the battery can be obtained.

Productive in extreme weather conditions

Our electrically powered forklift trucks can run optimally even in extreme weather temperatures: from -10°C to 50°C, with an optimal operating temperature of 20-30°C.

Thermal Management System





Efficient and productive

Buying an electric forklift doesn't mean compromising on power, as electric powertrains provide full torque immediately and are smoother to operate. Making operating cycles shorter, driving up your operational productivity. With extended servicing cycles and improved diagnostic tools your machine will benefit from higher availability rates than the diesel alternatives.

A simpler design



Electric forklifts have less moving parts than diesel models. Without the need to change the starter motor, turbo or fuel filters, servicing and maintenance on the powertrain will take less time and cost up to 50% less. As less parts are required, your parts replacement costs and stock levels will also be substantially reduced.

Optimise your settings



All Kalmar Electric Forklifts have easily adjustable settings from the control panel for:

- acceleration 1-10 (10-100%)
- deceleration 1-10 (10-100%) brake regen.

Reduce energy usage by up to 25%

Kalmar ECO Drive allows you to optimise your truck's performance with three different modes:

Power Mode:

when high performance is required. With full motor power, you will be able to move quickly about, lift and lower at full speed, without compromising on safety.

Normal Mode:

when you need a balance between energy usage and productivity. You can expect slightly lower acceleration and speeds.

Economy Mode:

when you need the most efficient energy usage. With reduced acceleration and speeds - your batteries will run for longer.

Save up to 15%

Save up to 25%

Designed for the driver

Ergonomically designed

Kalmar Electric Forklifts come fitted with our ergonomically designed EGO cabin. With slim line a-pillars, adjustable seating, steering wheel and control panel, your drivers will benefit from a superior operating environment and visibility.




A healthier work environment

Electric forklifts have always been seen as specialist machines for handling sensitive goods, in fact they deliver many additional benefits:

 Less vibrations make handling sensitive goods safer and reduce stress and strain on your operator's body.

 Electric forklifts are extremely quiet, making working indoors less disruptive for both operators and by-standers.

 As electric forklifts produce no exhaust fumes they are safe to operate inside and where other staff are working or sensitive goods are stored.

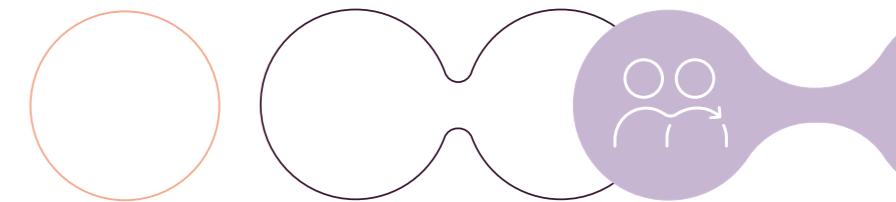

More comfortable

With a choice of comfortable driver seats, a fault safe pedal system and powerful Electronic Climate Control system with smarter controls your operator will benefit from improved ventilation heating and cooling, plus a cabin with superior comfort and lowest noise level inside and outside.

Easy to operate

Our electrically powered forklift trucks give you a wide choice electric-servo lifting levers, dual lever joystick or single joystick, an electronically adjustable work console and side tilting steering wheel. All designed to make operating your reachstacker easier and more efficient to operate.

Extra smart

Our intuitive user interface combines visibility, sound and touch to create a perfectly balanced operating environment with an intelligent colour display at its heart. Advanced diagnostics, battery status overview and smart settings allow improved operational control and optimal charging planning.

Options

Kalmar has a range of options that make operating your equipment even safer.

 **Reverse Beeper System.** When your staff are working side by side with moving vehicles there is always a safety risk. Installing a reverse beeper system provides a clear acoustic alert when the machine is reversing so personnel can make sure that they are out of harm's way at all times.

 **Additional lighting.** Extra lighting, particularly if you operate your machine at night, as you can bring greater operational visibility and safety for personnel working on the site. You can choose additional LED working lamps on specific positions.

 **Reverse Warning System.** Knowing what's going on behind you is critical when other personnel are present. Rear sensors and a reversing camera relay real-time information to an in-cabin display, alerting the driver to any dangers, increasing personnel and driver safety. You can also add additional cameras e.g. on the front of the machine, on the mast, carriage or forks.

Kalmar has a range of solutions that will help make your equipment more eco-efficient and sustainable.

 **Tyre Pressure Monitoring System.** Helps to reduce wear and tear on tyres which results in reduced fuel consumption. Bluetooth sensors keep the driver advised of the condition of the tyres continually. Active care of your tyres can result in a 10-40% increase in tyre life.

 **Fire Suppression System.** To protect your operator and machine from fire you can fit a Fire Suppression System* to your machine. The system utilises multiple spray nozzles that release a high pressure water mist where the fire has been detected from a re-chargeable water tank. This can be activated manually or automatically through an in-cabin temperature sensor.

 **Turnable Driver Seat.** Rotates 180° for improved safety and visibility when handling and transport large size cargo.

 **Raised cabin cassette.** Lifts up the cabin position with 300 mm, to improve safety and visibility when handling and transport large size cargo.

 **Mini-steering or Lever-steering.** Improves driver safety, performance and ergonomics when operating in confined space with tight manouevrings needed.



A range of options that make operating your equipment even safer and more sustainable.

What do you need to lift?

Choose between a wide range of lifting masts, carriages, forks and attachments. We offer complete solutions whereby we assemble the attachment in the factory and integrate it with the forklift's other functions.

Forestry industries

With our 5-9 tonnes electric forklift you will be able to handle most loads indoors or out, including lumber packages, pulp, paper, board and waste. Moving raw materials off trucks or train trays, to moving wood around during the milling process or lifting and moving final goods ready for dispatch.



Metal industry

Our light electric forklift truck can lift metal slabs, plates, coils and pipes up to 9 tonnes in weight, which is made even easier and safer when you have a magnet, a clamp or coil ram fitted to the lifting equipment.




Concrete, energy and heavy industry

Flat round or bulky pre-cast concrete, bricks and other heavy loads for the wind, oil, gas and biomass sectors will be handled with ease.



Logistics and stevedoring

Whether you're moving sensitive goods like fresh fruit and vegetables, pallets filled with goods ready for dispatch or moving empty containers this electric forklift can handle your loads efficiently and safely both indoors and out as it produces no carbon emissions.

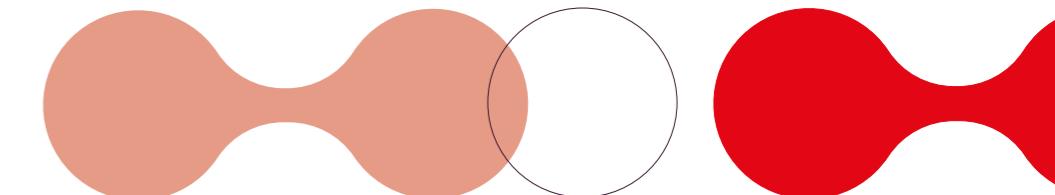

Safety fitted as standard



All Kalmar equipment is compliant with EN 1175:2020.

At Kalmar, the safety of people working with our machines is always at the top of our minds, which is why meeting global safety standards is important to us. The safety standard EN 1175:2020, which sets the electrical and electronic component standards for industrial trucks, has been updated to improve the safety of these machines while in operation. This update is valid from April 2023. All Kalmar counter balanced machines, including reachstackers, empty container handlers and forklifts have been updated to meet this new standard to ensure that working with a Kalmar machine is as safe as it can be.

For Kalmar, the safety of your drivers and maintenance staff is of critical importance, which is why our machines come with many more safety features fitted as standard than other machines available in the market.

The features listed here come fitted as standard on all Kalmar machines. You can enhance your employees' safety further by fitting your machine with our additional safety options listed on the following pages.



2-point seat belt. Ensures that your driver is safe and secure while operating our equipment, all Kalmar machines are equipped with an adjustable 2-point seat belt system.



3-point Contact System. Makes sure your drivers are safe when entering or exiting our equipment. All machines are fitted with steps and handles to ensure they can always maintain three points of contact with the vehicle, helping to keep them safe and preventing incidental injuries.



Double brake pedals. To avoid driver leg fatigue, every machine is equipped with dual brake pedals which require only heel to toe movements, allowing the driver to move his foot between the accelerator and brake pedals without having to move their leg.



Steps with anti-slip protection. To reduce the risk of your driver slipping or falling on our equipment, all entering and exiting points are fitted with non-slip surfaces giving them extra grip, so your drivers stay safe.



Control System. All our equipment is fitted with an electronic Control System for monitoring the machine's different functions while in operation, helping to keep your driver fully informed at all times with up-to-date Operating, Event Controlled and Error Code information.



Operating information. Our equipment's Control System provides several operating information menus, which give your operator and maintenance personnel a great insight into the on-going performance of the machine, allowing them to keep it running optimally.



Event controlled information. Provided through the Overload Protection System to warn the driver through the equipment's Control System if their load exceeds the specified safety limits.



Error code information. Should there be any issue with your equipment while in operation, the electronic control system will immediately alert your driver with the appropriate error code, so they know exactly what is going on and can take appropriate action.



Display. Cabins are fitted with a large easy to read display which keeps your drivers fully aware of the machine's on-going performance and any maintenance actions that need to be taken.



Control Breaker System for load handling.

All of our equipment is fitted with a Control Breaker System, which automatically shuts down the load handling system should a fault occur, until the fault has been corrected. Keeping your driver, equipment and load safe.



Operator Presence Detection System. Maintains the highest levels of safety for both the driver and pedestrians, as all our equipment is fitted with an alarm or visual indicator that comes on automatically if:

- The driver does not fasten their seat belt while in operation.
- The driver leaves their seat without engaging the parking brake.

In addition, if the driver leaves their seat while the machine is operational, the transmission is automatically shifted to neutral and load-handling functions are disabled.



Engine/transmission Protection and Warning Systems. Warning systems, designed to protect your machine's driveline in case of higher than expected temperatures or a pressure build up, are standard on all equipment, avoiding unnecessary mechanical failures.



External reverse light. For the safety of others, all our equipment is equipped with external reversing lights that help the driver keep everyone informed that they are moving backwards.



LED lights. These come fitted as standard on all our equipment, providing better visibility when working in reduced light than halogen lights.



Neutral start switch. A neutral start switch means your driver can't start his machine while it is in gear, preventing any damage to the driveline and any uncontrolled equipment movements.



Protection against falling objects. Cabin roof windows on all our equipment are fitted with high strength materials which can withstand heavy blows, helping to protect your drivers from falling objects.



Good visibility. Kalmar cabins provide your drivers with excellent visibility, forwards, upwards, sideways and behind them to help them stay safe while in operation.



Keep moving with Kalmar Services


To keep your business moving Kalmar Services offers a range of services that can help you keep your equipment moving optimally.

Kalmar Care

Care that keeps your business moving.

With Kalmar Care you get a flexible service that's built around your business. Including, the experience and knowledge of Kalmar's dedicated staff, coupled with transparency and increased predictability of costs.

Kalmar Care is available in three different service models: our two customisable contracts – Essential Care and Complete Care – and our flexible solution On Demand Care.

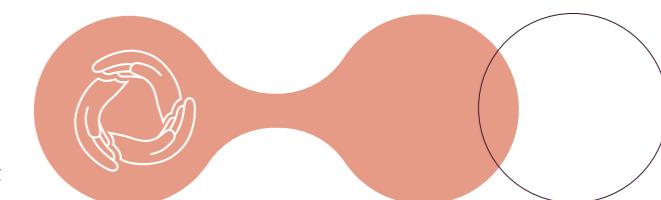

Service models:

Essential Care
A maintenance solution to keep your equipment in an optimal condition.



Maintenance Planning

Preventive Maintenance

Predictive Maintenance

Corrective Maintenance

Preventive Spare Parts

Corrective Spare Parts

Lubricants

MyKalmar

Kalmar Insight

Tyre Maintenance

Battery Maintenance



Complete Care
A complete service solution providing piece of mind and maximum equipment uptime.



On Demand Care
Top-of-the-line service whenever you need it.

Top-of-the-line service whenever you need it


● Included ● Optional



MyKalmar

Keeping your cargo moving.

The MyKalmar portal brings together many of Kalmar's digital services into one place. With a single point of access and a user-friendly design you'll benefit from greater visibility and control over your maintenance activities, parts ordering and equipment performance - helping you improve your operational performance, safety and efficiency across your entire fleet.

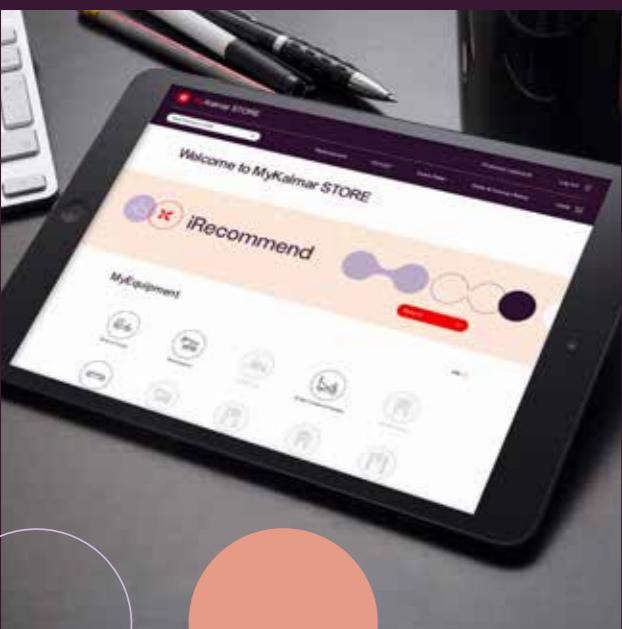

MyKalmar STORE


MyKalmar STORE is your one stop shop for all the parts you need which is accessible through MyKalmar. Open 24/7, accessible on any screen and available in different languages. MyKalmar STORE stocks 100's of thousands of Kalmar Genuine Parts at any given time and we can have them delivered quickly to you, no matter where you are in the world. You can search, order and then track your order all through the same application. MyKalmar STORE has been designed to make your life easier.

Kalmar Insight

Optimise your operations with Kalmar Insight.

Kalmar Insight* is a performance management tool for cargo handling, which gives you an easy to use overview of your fleet operations, by aggregating data from multiple sources, including equipment built by other manufacturers. Review your entire fleet activities, schedule maintenance activities and order

the required parts automatically. All enabling you to take action on real-time information, that will help improve your overall operations immediately. Kalmar Insight comes fitted and ready to be activated in all new Kalmar equipment, it can also be retrofitted into existing Kalmar equipment or those built by other manufacturers.

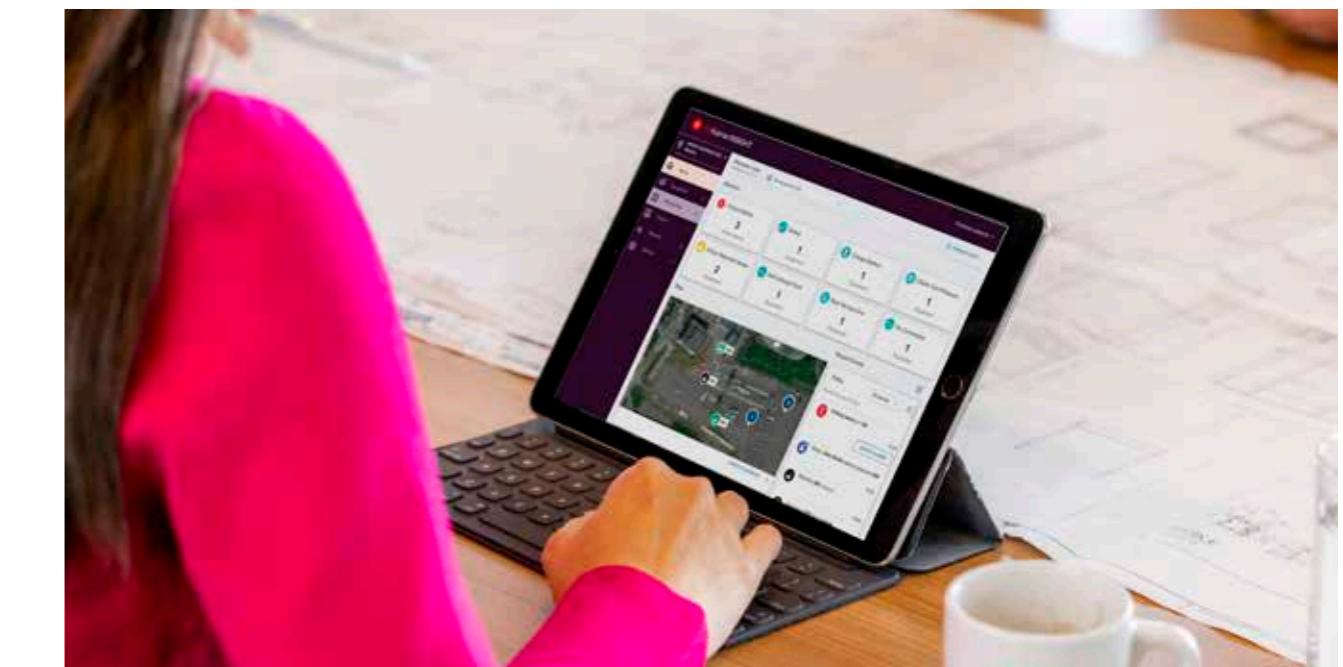


*Installation costs and/or an annual subscription fee may apply.

Kalmar Training

Enhance your skills.

To get the most out of your new machine our training centre offers a range of courses for both your technicians and operators. Operators can be taught how to drive the machine for optimum performance and minimum waste, and to learn what needs to be checked daily for optimal safety. Technicians can be educated with the knowledge they need to keep your new equipment in top condition in a safe way. Courses are a mix of theory and hands-on experience.

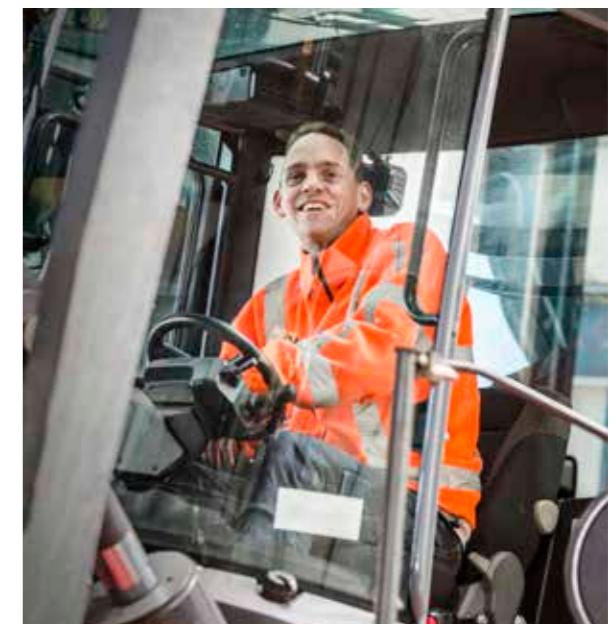

Specifications


Models Lifting Capacity	Wheel Types	ECG50-6	ECG55-6	ECG60-6	ECG70-6	ECG80-6		ECG80-9	ECG80-9S	ECG80-11	ECG85-9	ECG90-6L	ECG90-6LS	ECG70-6C	
						Full capacity with Pneumatics and with Super-Elastics									
FORKLIFT DIMENSIONS	Models	ECG50-6	ECG55-6	ECG60-6	ECG70-6	ECG80-6	ECG80-6S	ECG80-9	ECG80-9S	ECG80-11	ECG85-9	ECG90-6L	ECG90-6LS	ECG70-6C	
	Rated capacity (with SS/FP carriages)	kg	5000	5500	6000	7000	8000	8000	8000	8000	8500	9000	9000	7000	
	Load centre distance	L4	mm	600	600	600	600	600	900	900	1100	900	600	600	
	Truck length (to fork face front)	L	mm	3410	3410	3782	3782	3942	3845	4140	3942	4145	4140	3942	
	Lost load centre (centre drive axle - fork face)	L2	mm	727	727	727	727	792	792	797	802	797	797	655	
	Wheelbase	L3	mm	2100	2100	2450	2450	2600	2450	2800	2600	2800	2800	1900	
	Truck width (over tires)	B	mm	1550	1550	2000	2000	2000	2000	2000	2000	2000	2000	1525	
	Roof height cabin (basic forklift)	H6	mm	2590	2590	2590	2590	2590	2590	2590	2590	2590	2590	2525	
	Seat height cabin	H8	mm	1440	1440	1440	1440	1440	1440	1440	1440	1440	1440	1375	
	Height / width, max (with tilted cabin)	T1 / T2	mm	3020 / 2850	3020 / 2850	3020 / 3050	3020 / 3050	3020 / 3050	3020 / 3050	3020 / 3050	3020 / 3050	3020 / 3050	3020 / 3050	2680 / 2740	
LIFTING EQUIPMENT	Track (c-c), front / rear	S1 / S2	mm	1260 / 1265	1260 / 1265	1500 / 1360	1500 / 1360	1500 / 1360	1500 / 1360	1500 / 1360	1500 / 1360	1500 / 1360	1500 / 1360	1170 / 1170	
	Turning radius, outer / inner	R1 / R2	mm	3000 / 115	3000 / 115	3390 / 155	3390 / 155	3390 / 155	3390 / 155	3740 / 365	3530 / 270	4080 / 920	3740 / 365	3740 / 365	
	Aisle width min. at 90° driving with forks	A1	mm	5080	5080	5520	5520	5520	5520	6540	6320	7290	6540	5940	
	Ground clearance, min - max		mm	160	160	160	160	160	160	160	160	160	160	120	
	Duplex Standard ²	Lifting height	H4	mm	4000	4000	4000	4000	4000	4000	4000	4000	4000	4000	
	Mast height, min	H3	mm	2875	2875	2875	2875	3185	3185	3310	3310	3185	3185	2820	
	Mast height, max	H5	mm	5000	5000	5000	5000	5160	5160	5285	5285	5160	5160	4995	
WEIGHTS (Lead Acid)	Mast tilt, forward - backward	a - B	°	6 / 9	6 / 9	6 / 9	6 / 9	6 / 9	6 / 9	6 / 9	6 / 9	6 / 9	6 / 9	5 / 5	
	Carriage ³	Carriage type, functions		Side Shift / Fork Position (SS/FP)	Side Shift / Fork Position (SS/FP)	Side Shift / Fork Position (SS/FP)	Side Shift / Fork Position (SS/FP)	Side Shift / Fork Position (SS/FP)	Side Shift / Fork Position (SS/FP)	Side Shift / Fork Position (SS/FP)	Side Shift / Fork Position (SS/FP)	Side Shift / Fork Position (SS/FP)	Side Shift / Fork Position (SS/FP)	Side Shift / Fork Position (SS/FP)	
	Sideshift forks, max stroke / at opening (c-c)	V1 - V	mm	300 - 800	300 - 800	300 - 800	300 - 800	375 - 1150	375 - 1150	375 - 1150	375 - 1150	375 - 1150	375 - 1150	300 - 800	
	Forks Position, outside width, min-max.	V	mm	420 - 1400	420 - 1400	420 - 1400	420 - 1400	420 - 1900	520 - 1900	520 - 1900	520 - 1900	520 - 1900	520 - 1900	420 - 1400	
	Forks ⁴	Width x Thickness	b	mm	150 x 60	150 x 60	150 x 60	150 x 60	150 x 60	200 x 65	200 x 70	200 x 65	200 x 65	150 x 60	
WEIGHTS (Lithium-ion)	Length	l	mm	1200	1200	1200	1200	1200	1800	2200	1800	1800	1200	1200	
	Service weight ⁵	Battery (Lead Acid / standard)	kg	8700	9150	10200	10200	11700	11800	13100	12900	13800	13500	12500	
	Without battery		kg	6400	6850	7300	7300	8300	8400	9400	9500	10100	9800	8800	
	Axle load front	Unloaded	kg	4400	4400	5000	5000	5700	5550	6550	6000	6700	6550	6400	
WEIGHTS (Lithium-ion)	At rated load	kg	12600	13400	14250	15800	18000	18100	19400	19200	20100	20200	19900	19700	
	Axle load rear	Unloaded	kg	4300	4750	5200	5200	6000	6250	6600	6900	7100	6700	6100	
	At rated load	kg	1150	1300	1960	1415	1680	1700	1750	1670	1680	1850	1600	1700	
	Service weight ⁵	Integral battery (Lithium-ion)	kg	8700	9150	10200	10200	11700	11800	13100	12900	13800	13500	12500	12400
WHEELS (PNE + SE + CS)	Axle load front	Unloaded	kg	4400	4400	5000	5000	5700	5500	6550	6000	6700	6550	6400	5900
	At rated load	kg	12600	13400	14250	15800	18000	18000	19400	19200	20100	20200	19900	19700	15450
	Axle load rear	Unloaded	kg	4300	4750	5200	5200	6000	6250	6600	6900	7100	6700	6100	6500
	At rated load	kg	1150	1300	1950	1415	1680	1700	1750	1670	1680	1850	1600	1700	1550
AXLES	Wheels ⁶	Number of wheels, front - rear (x = driven)		2x - 2	4x - 2	4x - 2	4x - 2	4x - 2	4x - 2	4x - 2	4x - 2	4x - 2	4x - 2	2x - 2	
	Pneumatics	Tyres type / pressure (front - rear)	Mpa	Diagonal - Radial / 1.0 - 0.9	Diagonal - Radial / 1.0 - 0.9	Diagonal - Radial / 1.0 - 0.9	Diagonal - Radial / 1.0 - 0.9	8.25x15 ◊ 8.25x15	-						
		Tyres dimensions, front - rear	tum	315/70x15 ◊ 8.15x15	8.25x15 ◊ 8.25x15	8.25x15 ◊ 8.25x15	8.25x15 ◊ 8.25x15	6.50x15 ◊ 6.50x15	-						
		Rims dimensions, front - rear	tum	8.00x15 ◊ 7.00x15	6.50x15 ◊ 6.50x15	6.50x15 ◊ 6.50x15	6.50x15 ◊ 6.50x15	6.50x15 ◊ 6.50x15	6.50x15 ◊ 6.50x15	6.50x15 ◊ 6.50x15	6.50x15 ◊ 6.50x15	6.50x15 ◊ 6.50x15	6.50x15 ◊ 6.50x15	-	
	Super-Elastic	Tyres type / no pressure (front - rear)	Mpa	Super-Elastic (SE)	Super-Elastic (SE)	Super-Elastic (SE)	Super-Elastic (SE)	8.25x15 ◊ 8.25x15	Cushion-Solid (CS)						
		Tyres dimensions, front - rear	tum	355/65x15 ◊ 225/75x15	8.25x15 ◊ 8.25x15	8.25x15 ◊ 8.25x15	8.25x15 ◊ 8.25x15	6.50-15 ◊ 8.00x15	6.50-15 ◊ 6.50x15	28x14x22 ◊ 22x9x16					
		Rims dimensions, front - rear	tum	9.75x15 ◊ 7.00x15	6.50x15 ◊ 6.50x15										

Powertrain

MODELS WHEEL- BASES	Models	mm	ECG50-6	ECG60-6	ECG80-6	ECG80-11	ECG70-60C
			ECG50-6	ECG70-6	ECG80-9S	ECG85-9	
			ECG55-6	ECG80-6S	ECG90-6LS	ECG90-6L	
	Wheelbase	mm	2100	2450	2600	2800	1900
ELECTRIC POWERTRAIN	Motor, manufacturer			Schabmüller Germany			
	Motor, type / model / active cooling ¹			AC motor / asynchronous / air-cooled			
	Motor, speed control type / number of steps			High frequency MOSFET / Stepless			
	Output power - drive motor (at duty class)	kW		2 x 17.6 kW (S2 60 min) / with air cooling ¹			
	Output power - pump motor (at duty class) intermittent	kW		1 x 42 kW (S3 18%) / with air cooling ¹			
	Output power - brake motor (at duty class) intermittent			1 x 2.2 kW (S1) / no cooling			
	Regenerative brake function			Yes / charging of battery			
	Acceleration settings / power programming			In 10 steps (1 - 10)			
	Retardation settings / brake programming			In 10 steps (1 - 10)			
	Energy consumption ² , normal driving, lower duty:	kWh/h	12-14	14-16	14-16	14-16	12-14
BATTERY (Lead Acid)	Energy consumption ² , normal driving, medium duty	kWh/h	14-16	16-18	16-18	16-18	14-16
	Energy consumption ² , normal driving, higher duty	kWh/h	16-18	18-20	18-20	18-20	16-18
	Battery / charger, type - voltage - number of units	V		Lead Acid / 80V / 1+1			
	Nominal energy capacity ³ (min-max) at SOC 100%	kWh	74 / 83	99 / 110	99 / 110	124 / 138	74 / 83
	Useable energy capacity ³ (min-max) at SOC 80%	kWh	59 / 66	79 / 88	79 / 88	99 / 110	59 / 66
	Capacity at 5h discharge, current, min-max	Ah	930 / 1032	1240 / 1376	1240 / 1376	1550 / 1720	930 / 1032
	Battery weight, min-max (per battery)	kg	2300 - 2400	2900 - 3100	2900 - 3100	3700 - 3900	2300 - 2400
	Battery dimensions (W x H x L)	cm	130 x 78 x 85	150 x 78 x 99	150 x 78 x 99	150 x 78 x 119	130 x 78 x 85
	Charging power, min / max (per charger)	kW		20 / 28			
	Charging power supply ⁴ (per charger)	A		1x 32 / 1x 63 CEE			
BATTERY (Lithium-ion)	Charger / battery connector, type - size			REMA-320 (1x)			
	Battery / charger, type - voltage - number of units	V		Lithium-ion (LFP) integral / 77V / 1+1			
	Nominal energy capacity (min-max) at SOC 100%	kWh	44	83	83	83	44
	Useable energy capacity (min-max) at SOC 80%	kWh	35	66	66	66	35
	Capacity at 5h discharge, current, min-max	Ah	576	1080	1080	1080	576
	Charging power ¹ , max	kW		23 / 36 / 45			
	Charging power socket ⁴	A		1x 63 / 2x 32 / 2x 63 CEE			
	Charger / battery connector, type - size			REMA-640 (1x)			

Notes:

1. Normal Speed version: air cooling is optional.
High Speed version: air cooling is standard.
2. Energy consumption based on duty cycles (intensity):
Lower duty / Medium duty / Higher duty
3. Battery / charger: multiple brands and performances.
4. Power supply: voltage 380-440 V / 3-phase + NE / 50-60 Hz.

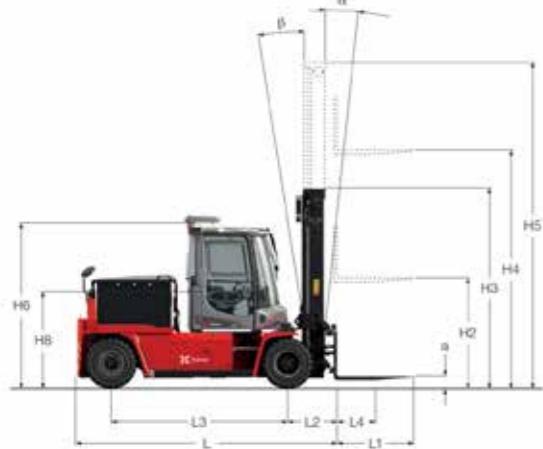


Performance

MODELS	ECG 50-6	ECG 55-6	ECG 60-6	ECG 70-6	ECG 80-6	ECG 80-6S	ECG 80-9	ECG 80-9S	ECG 80-11	ECG 85-9	ECG 90-6L	ECG 90-6LS	ECG 70-60C
Travel speed (NS ¹), forward - reverse	Unloaded	km/h	18 - 18		17 - 17		17 - 17		17 - 17		17 - 17		15 - 15
	Rated load	km/h	15 - 15		15 - 15		15 - 15		14 - 14		14 - 14		10 - 10
Travel speed (HS ²), forward - reverse	Unloaded	km/h	23 - 23		22 - 22		22 - 22		22 - 22		22 - 22		-
	Rated load	km/h	21 - 21		20 - 20		20 - 20		19 - 19		19 - 19		-
Lifting speed	Unloaded	m/s	0,40		0,32		0,32		0,32		0,32		0,32
	(70%)	Rated load	m/s	0,35		0,31		0,31		0,31		0,31	
Lowering speed	Unloaded	m/s	0,45		0,45		0,45		0,45		0,45		0,45
	Rated load	m/s	0,50		0,50		0,50		0,50		0,50		0,50
Gradeability, max	Unloaded	%	56	53	51	46	41	41	37	37	35	34	38
	Rated load	%	32	30	28	25	22	22	21	21	20	19	20
Gradeability, at 2 km/h	Unloaded	%	42	40	39	36	32	32	29	29	27	26	30
	Rated load	%	24	23	22	20	17	17	16	16	15	14	16
Drawbar pull		kN	40	40	40	40	40	40	40	40	40	40	40

Notes:
1. NS = Normal-Speed version (NS)
2. HS = High-Speed version (HS)

Load Diagram

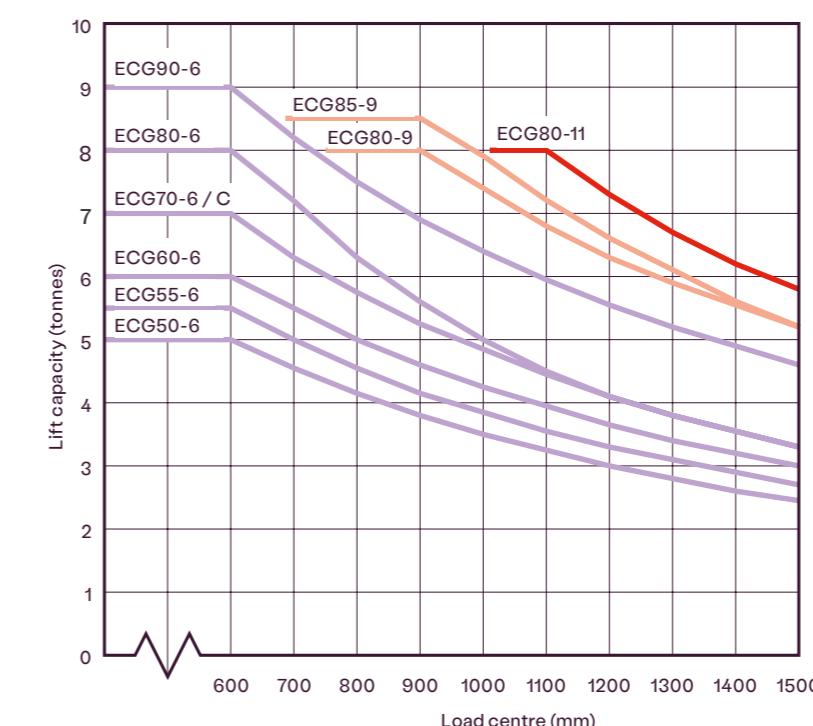

1. Full capacity with lift height 4.00 m, masts Duplex, Freelite and Triplex, carriage Sideshift / Forkposition (SS/FP) and with / without Fork Shaft System: valid for ECG50-6, 55-6, 60-6, 70-6 and 80-6.

2. Full capacity with lift height 4.00 m, masts Duplex, carriage Sideshift / Forkposition (SS/FP) and without Fork Shaft System: valid for ECG80-9, 80-11, 85-9 and 90-6L.

3. Short and long wheelbase model versions have the same lifting capacity as each other: valid for the ECG80-6/ECG80-6S, ECG80-9/ECG80-9S and ECG90-6L/ECG90-6LS.

Lifting data

We offer a full range of duplex, triplex and free-lift equipment.*

ECG50-70			ECG80-90			ECG80-11 / 85-9			ECG70-6C		
Lift Height	Mast Height	Free Lift	Lift Height	Mast Height	Free Lift	Lift Height	Mast Height	Free Lift	Lift Height	Mast Height	Free Lift
H4	H3 min H5 max	H2	H4	H3 min H5 max	H2	H4	H3 min H5 max	H2	H4	H3 min H5 max	H2
2750	2250	3750	—	2750	2560	3910	—	2750	2685	4035	—
3000	2375	4000	—	3000	2685	4160	—	3000	2810	4285	—
3250	2500	4250	—	3250	2810	4410	—	3250	2935	4535	—
3500	2625	4500	—	3500	2935	4660	—	3500	3060	4785	—
3750	2750	4750	—	3750	3060	4910	—	3750	3185	5035	—
4000	2875	5000	—	4000	3185	5160	—	4000	3310	5285	—
4250	3000	5250	—	4250	3310	5410	—	4250	3435	5535	—
4500	3125	5500	—	4500	3435	5660	—	4500	3560	5785	—
4750	3250	5750	—	4750	3560	5910	—	4750	3685	6035	—
5000	3375	6000	—	5000	3685	6160	—	5000	3810	6285	—
5250	3500	6250	—	5250	3810	6410	—	5250	3935	6535	—
5500	3625	6500	—	5500	3935	6660	—	5500	4060	6785	—
5750	3750	6750	—	5750	4060	6910	—	5750	4185	7035	—
6000	3875	7000	—	6000	4185	7160	—	6000	4310	7285	—
6500	4125	7500	—	6500	4435	7660	—	6500	4560	7785	—
7000	4375	8000	—	7000	4685	8160	—	7000	4810	8285	—
ECG50-70			ECG80-90			ECG80-11 / 85-9			ECG70-6C		
Lift Height	Mast Height	Free Lift	Lift Height	Mast Height	Free Lift	Lift Height	Mast Height	Free Lift	Lift Height	Mast Height	Free Lift
H4	H3 min H5 max	H2	H4	H3 min H5 max	H2	H4	H3 min H5 max	H2	H4	H3 min H5 max	H2
2750	2375	3850	1280	2750	2560	3910	1405	2750	2685	4035	1405
3000	2500	4100	1405	3000	2685	4160	1530	3000	2810	4285	1530
3250	2625	4350	1530	3250	2810	4410	1655	3250	2935	4535	1655
3500	2750	4600	1655	3500	2935	4660	1780	3500	3060	4785	1780
3750	2875	4850	1780	3750	3060	4910	1905	3750	3185	5035	1905
4000	3000	5100	1905	4000	3185	5160	2030	4000	3310	5285	2030
4250	3125	5350	2030	4250	3310	5410	2155	4250	3435	5535	2155
4500	3250	5600	2155	4500	3435	5660	2280	4500	3560	5785	2280
4750	3375	5850	2280	4750	3560	5910	2405	4750	3685	6035	2405
5000	3500	6100	2405	5000	3685	6160	2530	5000	3810	6285	2530
5250	3625	6350	2530	5250	3810	6410	2655	5250	3935	6535	2655
5500	3750	6600	2655	5500	3935	6660	2780	5500	4060	6785	2780
5750	3875	6850	2780	5750	4060	6910	2905	5750	4185	7035	2905
6000	4000	7100	2905	6000	4185	7160	3030	6000	4310	7285	3030
6500	4250	7600	3155	6500	4435	7660	3280	6500	4560	7785	3280
7000	4500	8100	3405	7000	4685	8160	3530	7000	4810	8285	3530
ECG50-70			ECG80-90			ECG80-11 / 85-9			ECG70-6C		
Lift Height	Mast Height	Free Lift	Lift Height	Mast Height	Free Lift	Lift Height	Mast Height	Free Lift	Lift Height	Mast Height	Free Lift
H4	H3 min H5 max	H2	H4	H3 min H5 max	H2	H4	H3 min H5 max	H2	H4	H3 min H5 max	H2
4200	2320	5260	1280	4200	2580	6190	1470	4200	2580	6190	1470
4450	2410	5510	1370	4450	2670	5330	1560	4450	2670	5330	1560
4700	2490	5760	1450	4700	2750	5580	1640	4700	2750	5580	1640
4950	2570	6010	1530	4950	2830	5830	1720	4950	2830	5830	1720
5200	2660	6260	1620	5200	2920	6080	1810	5200	2920	6080	1810
5450	2740	6510	1700	5450	3000	6330	1890	5450	3000	6330	1890
5700	2820	6760	1780	5700	3080	6580	1970	5700	3080	6580	1970
5950	2910	7010	1870	5950	3170	6830	2060	5950	3170	6830	2060
6200	2990	7260	1950	6200	3250	7080	2140	6200	3250	7080	2140
6450	3070	7510	2030	6450	3330	7330	2220	6450	3330	7330	2220
6950	3240	8010	2200	6950	3500	8080	2390	6950	3500	8080	2390

Notes*:

- All mast heights with standard tyres.
- The lifting cylinders are mounted behind the mast profiles on Duplex Standard, Duplex Freelift & Triplex Freelift.
- The freelift cylinders are mounted inside the mast profiles on Duplex Freelift and Triplex Freelift.
- Duplex Heavy-Duty: mast range with additional reinforcements.

Masts



Duplex Standard
Lift height 2750 - 7000 mm



Duplex Freelift
Lift height 2750 - 7000 mm




Triplex Freelift
Lift height 4200 - 6950 mm


Carriages



For manual
FEM-forks



For Sideshift
only (SS)



For Sideshift /
Forkposition (SS/FP)
and Centre Levelling



For Sideshift /
Forkposition (SS/FP)
and fork
levelling

Forks



Manual FEM



With roller
bearings (SS/FP)



On Fork Shaft System
with roller bearings
(SS/FP)



With roller bearings
(SS/FP) and fork
levelling

Der Partner in
Ihrer Nähe



www.kalmarglobal.com

Published by Kalmar, Copyright © Kalmar Corporation 2024.
All rights reserved.

2024-03-24



Hedemann GmbH
Oldenburger Straße 28
D-26639 Wiesmoor

Tel.: +49 (0) 49 44 / 14 50
Mail: kontakt@hedemann-stapler.de
Web: www.hedemann-stapler.de